




# TFC Coaxial Cable Product Information Sheet

## Type: T6Q60/40-FE(AA) BLACK

**Series 6 Coaxial Cable**  
 Copper Clad Steel Conductor  
 Foamed Polyethylene Dielectric  
 Bonded APA Laminate Shield  
 60% Aluminum Braid  
 APA Laminate Shield  
 40% Aluminum Braid  
 Underground Floodant  
 Black Polyethylene Jacket  
 Animal Aversive

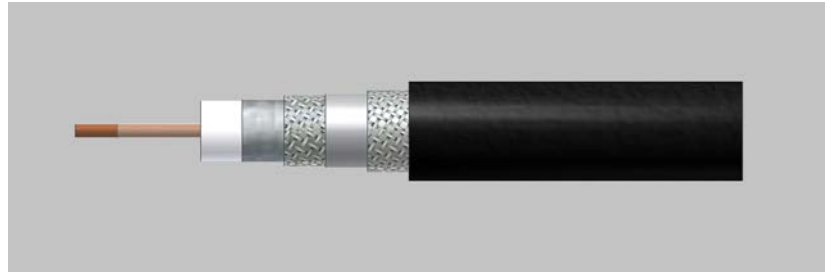

### Cable Ordering Information

Part Number	Description	NEC / CSA Listing
006Q64E84BK0610000R1	T6Q60/40-FE(AA) BLACK	none

### Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Steel	0.0403	1.02
Dielectric	Foamed Polyethylene	0.180	4.57
1 <sup>st</sup> Outer Conductor	Sealed APA Tape	0.188	4.78
2 <sup>nd</sup> Outer Conductor	60% Aluminum Braid	0.212	5.38
3 <sup>rd</sup> Outer Conductor	APA Tape	0.216	5.49
4 <sup>th</sup> Outer Conductor	40% Aluminum Braid	0.241	6.12
Floodant	Underground	---	---
Jacket	Polyethylene, Black, AA	0.297	7.54
Twisted Pairs	---	---	---
Messenger	---	---	---

### Mechanical Specifications

Minimum Bend Radius, in. (mm)		1.0	(25.40)
Product Weight	(less reel)	29 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t6q6040-fe{aa} black\_1ghz15.docx  
 Revision: 1.7.2015  
 Page: 1 of 2

Times Fiber Communications, Inc.  
 358 Hall Avenue  
 Wallingford, CT 06492  
 Toll Free +1-800-677-2288  
 Toll +1-434-432-1800  
 Fax +1-434-432-1821  
[www.timesfiber.com](http://www.timesfiber.com)

**uncontrolled copy**

All Rights Reserved,  
Specifications subject to change without notice



# TFC Coaxial Cable Product Information Sheet

## Type: T6Q60/40-FE(AA) BLACK

### Electrical Specifications

Impedance, $\Omega$	75 $\pm$ 3	
Velocity of Propagation, %	85	
Capacitance, Nominal	16.3 pF/ft	53.5 pF/m
DC Resistance	$\Omega$ / kft	$\Omega$ / km
Inner Conductor	31.0	102
Outer Conductor	5.24	17
Loop	36.2	119

### Attenuation, Maximum @ 68 °F (20 °C)

Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.58	1.90
55	1.60	5.25
211	3.05	10.01
250	3.30	10.83
270	3.37	11.06
300	3.55	11.65
330	3.74	12.27
350	3.85	12.63
400	4.15	13.62
450	4.40	14.44
500	4.66	15.29
550	4.90	16.08
600	5.10	16.73
750	5.65	18.54
870	6.11	20.05
1000	6.55	21.49

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t6q6040-fe{aa} black\_1ghz15.docx  
 Revision: 1.7.2015  
 Page: 2 of 2

Times Fiber Communications, Inc.  
 358 Hall Avenue  
 Wallingford, CT 06492  
 Toll Free +1-800-677-2288  
 Toll +1-434-432-1800  
 Fax +1-434-432-1821  
[www.timesfiber.com](http://www.timesfiber.com)

**uncontrolled copy**

All Rights Reserved,  
 Specifications subject to change without notice