




TFC Coaxial Cable Product Information Sheet

Type: TX10540JBVI / GNGN (AA)

540 Series Coaxial Cable
 Copper Clad Aluminum Conductor
 Foamed Polyethylene Dielectric
 Seamless Aluminum Tube Outer Conductor
 Underground Floodant
 Medium Density Polyethylene Jacket
 Visual Indicator Tracer(s) – Green (2X)
 Animal Aversive

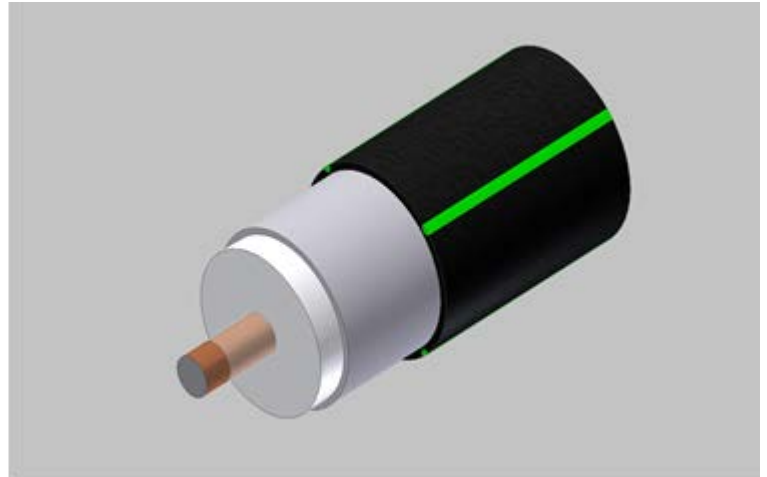

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
750540JBT0BK16300001	TX10540JBVI / GNGN (AA)	n/a

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.124	3.15
Dielectric	Foamed Polyethylene	0.513	13.0
Outer Conductor	Seamless Aluminum Tube	0.540	13.7
Floodant	Underground	0.550	14.0
Jacket	Polyethylene, Outdoor, Black, AA	0.610	15.5
Messenger	---	---	---
Cable Width	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)		4.0	(102)
Product Weight, lbs/kft (kg/km)	(less reel)	94	(140)

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx10540jbvi_gngn(aa)_1ghz15.doc
 Revision: 3.5.2015
 Page: 1 of 2

Times Fiber Communications, Inc.
 358 Hall Avenue
 Wallingford, CT 06492
 Toll Free +1-800-677-2288
 Toll +1-434-432-1800
 Fax +1-434-432-1821
www.timesfiber.com

uncontrolled copy

All Rights Reserved,
 Specifications subject to change without notice

