




# TFC Coaxial Cable Product Information Sheet

## Type: T15AQ60/40-FE BLACK

Series 15 Coaxial Cable  
 Copper Clad Aluminum Conductor  
 Foamed Polyethylene Dielectric  
 Bonded APA Laminate Shield  
 60% Aluminum Braid  
 APA Laminate Shield  
 40% Aluminum Braid  
 Underground Floodant  
 Black Polyethylene Jacket

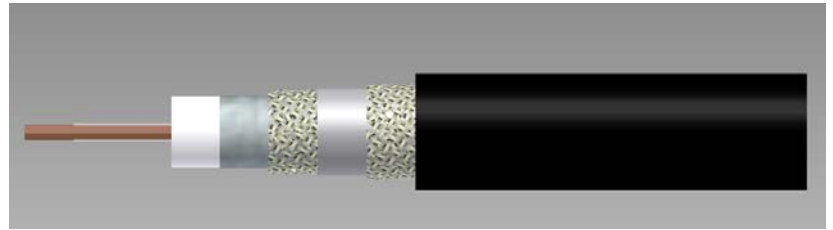

### Cable Ordering Information

Part Number	Description	NEC / CSA Listing
015Q64E00BK291	T15AQ60/40-FE BLACK	none

### Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.109	2.77
Dielectric	Foamed Polyethylene	0.455	11.56
1 <sup>st</sup> Outer Conductor	Sealed APA Tape	0.463	11.76
2 <sup>nd</sup> Outer Conductor	60% Aluminum Braid	0.490	12.45
3 <sup>rd</sup> Outer Conductor	APA Tape	0.494	12.55
4 <sup>th</sup> Outer Conductor	40% Aluminum Braid	0.523	13.28
Floodant	Underground	---	---
Jacket	Polyethylene, Black	0.615	15.62
Twisted Pairs	---	---	---
Messenger	---	---	---

### Mechanical Specifications

Minimum Bend Radius, in. (mm)		2.5	(63.50)
Product Weight	(less reel)	95 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx15aq6040-fe black\_1ghz12.doc  
 Revision: 5.10.2014  
 Page: 1 of 2

Times Fiber Communications, Inc.  
 358 Hall Avenue  
 Wallingford, CT 06492  
 Toll Free +1-800-677-2288  
 Toll +1-434-432-1800  
 Fax +1-434-432-1821  
[www.timesfiber.com](http://www.timesfiber.com)

**uncontrolled copy**

All Rights Reserved,  
 Specifications subject to change without notice

