




TFC Coaxial Cable Product Information Sheet

Type: T15AQ60/40-LTV BLACK

Series 15 Coaxial Cable
 Copper Clad Aluminum Conductor
 Foamed Polyethylene Dielectric
 Bonded APA Laminate Shield
 60% Aluminum Braid
 APA Laminate Shield
 40% Aluminum Braid
 Moisture Inhibiting lifeTime®
 Black PVC Jacket

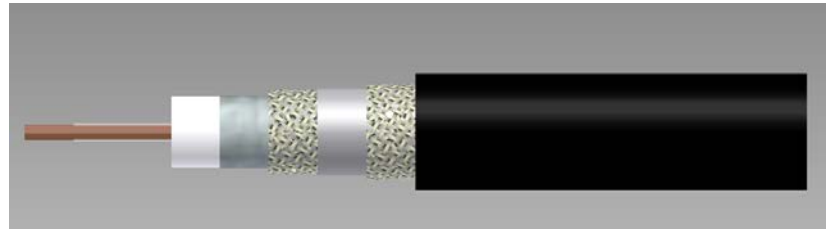

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
015Q64V01BK281	T15AQ60/40-LTV BLACK	none

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.109	2.77
Dielectric	Foamed Polyethylene	0.455	11.56
1 st Outer Conductor	Sealed APA Tape	0.463	11.76
2 nd Outer Conductor	60% Aluminum Braid	0.490	12.45
3 rd Outer Conductor	APA Tape	0.494	12.55
4 th Outer Conductor	40% Aluminum Braid	0.523	13.28
Floodant	Non-Drip lifeTime®	---	---
Jacket	PVC, Outdoor Grade, Black	0.615	15.62
Twisted Pairs	---	---	---
Messenger	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)		2.5	(63.50)
Product Weight	(less reel)	119 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx15aq6040-ltv black_1ghz12.doc
 Revision: 5.10.2014
 Page: 1 of 2

Times Fiber Communications, Inc.
 358 Hall Avenue
 Wallingford, CT 06492
 Toll Free +1-800-677-2288
 Toll +1-434-432-1800
 Fax +1-434-432-1821
www.timesfiber.com

uncontrolled copy

All Rights Reserved,
 Specifications subject to change without notice

